

## M50 Steel Bar - AMS 6490, AMS 6491

Alloy Steel M50 (AMS 6491, AMS 6490) is a high-performance bearing steel. M50 alloy steel possesses a high degree of hardness, excellent resistance to wear and abrasion, and is capable of retaining its strength properties at elevated temperatures. Primarily composed of iron alloyed with substantial amounts of chromium, molybdenum, and vanadium, this versatile steel exhibits truly outstanding properties.

Its standout quality is the remarkable hardness it can achieve after proper heat treatment, capable of 60 HRC minimum in the heat treated condition. This ultra-high hardness means that it has superb resistance against abrasive wear and superior durability under heavy bearing loads. Components made from M50 alloy steel can withstand punishing conditions that would rapidly degrade softer bearing materials.

In terms of the composition, the chromium forms hard carbide particles dispersed throughout the steel matrix, enhancing wear resistance. The molybdenum increases overall hardness and toughness. Vanadium promotes a fine-grained microstructure for greater strength.

Potential applications that capitalize on M50's exceptional properties include bearings for aircraft turbine engines, high-speed machine tool spindles, offshore oil equipment, and anywhere ultra-hard, wear-resistant bearing components are required to operate under high temperatures and loading.

Specific Gravity													
7.84 g/cm3													
Typical Applications							Related Specifications						
Aircraft Engine Bearings Helicopter Rotor Bearings Gas Turbines High Performance Racing Engines							AMS 6491, AMS 6490 1.3551 1.3552 AIR 9160C						
Chemical Composition (Wt %)													
	C	Mn	Si	P	S	Cr	Mo	V	Ni	Co	W	Cu	Fe
Min	0.8	0.15	-	-	-	4	4	0.9	-	-	-	-	Bal
Max	0.85	0.35	0.25	0.015	0.008	4.25	4.5	1.1	0.15	0.25	0.25	0.1	
Typical Mechanical Properties													
Typical Hardness													

Hardness in annealed condition 229HBW max
Capable of 60 HRC minimum in the heat treated condition

#### What is M50 Steel?

M50 is a high-carbon, high-vanadium tool steel known for excellent wear resistance and toughness. Its composition includes around 0.8% carbon, 4% chromium, 4.4% molybdenum, and 1.1% vanadium. The carbon provides hardness and wear resistance, while vanadium promotes a fine-grained microstructure for greater strength. M50 is widely used for bearings, cutting tools, punches, dies, and other wear-resistant components requiring high performance.

#### What material is AMS 6491?

AMS 6491 is the Aerospace Material Specification for M50, a high-carbon, high-vanadium tool steel.

It defines the chemical composition, mechanical properties, and heat treatment for this grade when used in aerospace applications requiring exceptional wear resistance, toughness, and hot hardness.

AMS 6491 ensures M50 steel meets strict aerospace industry standards and provides traceability. Referencing this specification guarantees manufacturers are using M50 steel that conforms to rigorous quality and performance criteria for critical aerospace components.

#### What are the typical uses for M50 Alloy Steel?

Typical uses of M50 include bearings for aircraft turbine engines, high-speed machine tool spindles, offshore oil equipment, and anywhere ultra-hard, wear-resistant bearing components are required to operate under high temperatures and loading.

\* This data has been supplied in good faith and is indicative only. It has been provided for general information purposes only and is not to be relied upon in place of the full specification. Mechanical properties can vary considerably with different supply conditions such as heat treatment or temper and product dimensions.

No liability will be accepted by Dynamic Metals Ltd in respect of any action taken by any third party in reliance of any of the data provided.

The information provided in this datasheet has been taken from multiple recognised sources. No guarantee is given that the information is from the latest issue of these sources and no guarantee is given that the information in the datasheet is accurate or up to date.

Material supplied by Dynamic Metals Ltd may vary significantly from this data but will conform to the relevant and applicable standards. All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale.

As the products detailed may be used for a wide variety of purposes and as Dynamic Metals Ltd has no control over their use, Dynamic Metals Ltd specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied.

Advice given by Dynamic Metals Ltd to any third party is given for that party's assistance only and without liability on the part of Dynamic Metals Ltd.

All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale. The extent of the Company's liabilities to any customer is clearly set out in those Conditions; a copy of which is available by request or by downloading from our website.

## General Enquiries

T: +44 (0) 1525 217 556 [\(tel:+4401525217556\)](tel:+4401525217556)

E: [sales@dynamicmetalsltd.com](mailto:sales@dynamicmetalsltd.com) [\(mailto:sales@dynamicmetalsltd.com\)](mailto:sales@dynamicmetalsltd.com)



## UK Address:

*Head Office*

40 Eden Way  
Chartwell Business Park  
Leighton Buzzard  
Bedfordshire  
LU7 4FY

T: +44 (0)1525 217 556 [\\_\(tel:+441525217556\)](tel:+441525217556)

*Conversion Centre*


Suite 2 Meadowhall Riverside  
Meadowhall Road  
Sheffield  
South Yorkshire  
S9 1BW

T: +44 (0)1143 030 320 [\\_\(tel:+4401143030320\)](tel:+4401143030320)

*Registered Office (only)*

The Granary  
Crowhill Farm Ravensden Road  
Wilden  
Bedfordshire  
MK44 2QS

T: +44 (0)1525 217 556 [\\_\(tel:+441525217556\)](tel:+441525217556)

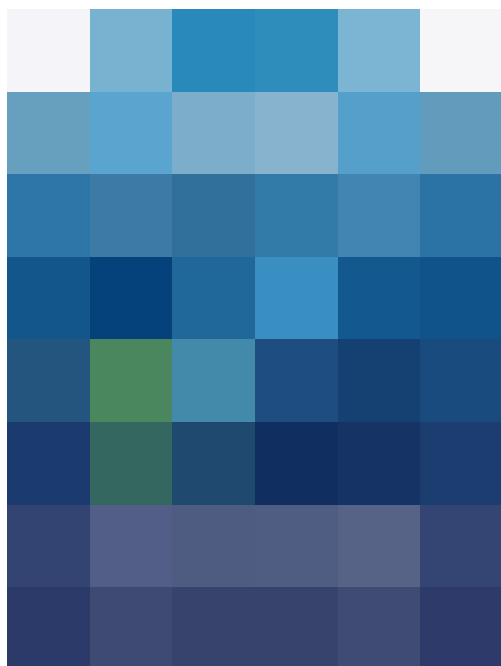

[\(/media/zn2dbklo/cyber-essentials-certified-plus.png\)](/media/zn2dbklo/cyber-essentials-certified-plus.png)



[\(/media/dyelbliq/cyber-essentials-certified.png\)](#)