

AMS 5662, AMS 5663 | NICKEL ALLOY 718 BAR

Alloy 718 (alternatively known by Special Metals trade name Inconel 718), is a nickel chromium alloy (AMS 5662, AMS 5663) which can be heat treated to give high strength, good corrosion resistance and is readily fabricated into complex parts with a very good resistance to postweld cracking. Alloy 718 can work effectively between -423 to 1300 deg F.

Specific Gravity															
7.98 g/cm3															
Typical Applications								Related Specifications							
Land based gas turbine engines Jet Engines Fasteners Instrumentation parts Mandrels Well head completion equipment								AMS 5662 AMS 5663 UNS N07718 ASTM B637 W.Nr 2.4668 MSRR 7114 MSRR 7115 NACE MR0175							
Chemical Composition															
	Ni	Cr	Fe	Mo	Nb+Ta	C	Mn	Si	Ph	S	Ti	Cu	B	Al	Co
Min	50	17	Bal	2.8	4.75	–	–	–	–	–	0.65	–	–	0.20	–
Max	55	21	–	3.3	5.50	0.08	0.035	0.35	0.015	0.015	1.15	0.30	0.0006	0.80	1.00
Mechanical Properties in Solution Annealed and Aged Condition for Aerospace bar															
0.2% Proof Stress								Tensile Strength	Elongation	Reduction of area	Hardness				
MPA								MPA	%	%	HB				
Min								Min	Min	Min	Min				
1034								1275	12	15	331				
Mechanical Properties in Solution Annealed and Aged Condition for Oil patch bar															
0.2% Proof Stress								Tensile	Elongation	Reduction	Hardness				

	Strength		of area	
MPA	MPA	%	%	HRC
Min	Min	Min	Min	Min
827	1034	17	25	40

* This data has been supplied in good faith and is indicative only. It has been provided for general information purposes only and is not to be relied upon in place of the full specification. Mechanical properties can vary considerably with different supply conditions such as heat treatment or temper and product dimensions.

No liability will be accepted by Dynamic Metals Ltd in respect of any action taken by any third party in reliance of any of the data provided.

The information provided in this datasheet has been taken from multiple recognised sources. No guarantee is given that the information is from the latest issue of these sources and no guarantee is given that the information in the datasheet is accurate or up to date.

Material supplied by Dynamic Metals Ltd may vary significantly from this data but will conform to the relevant and applicable standards. All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale.

As the products detailed may be used for a wide variety of purposes and as Dynamic Metals Ltd has no control over their use, Dynamic Metals Ltd specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied.

Advice given by Dynamic Metals Ltd to any third party is given for that party's assistance only and without liability on the part of Dynamic Metals Ltd.

All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale. The extent of the Company's liabilities to any customer is clearly set out in those Conditions; a copy of which is available by request or by downloading from our website.

General Enquiries

T: +44 (0) 1525 217 556 [\(tel:+4401525217556\)](tel:+4401525217556)

E: sales@dynamicmetalsltd.com [\(mailto:sales@dynamicmetalsltd.com\)](mailto:sales@dynamicmetalsltd.com)



UK Address:

Head Office

40 Eden Way
Chartwell Business Park
Leighton Buzzard
Bedfordshire
LU7 4FY

T: +44 (0)1525 217 556 [\(tel:+441525217556\)](tel:+441525217556)

Conversion Centre


Suite 2 Meadowhall Riverside
Meadowhall Road
Sheffield
South Yorkshire
S9 1BW

T: +44 (0)1143 030 320 [\(tel:+4401143030320\)](tel:+4401143030320)

Registered Office (only)

The Granary
Crowhill Farm Ravensden Road
Wilden
Bedfordshire
MK44 2QS

T: +44 (0)1525 217 556 [.\(tel:+441525217556\)](tel:+441525217556)

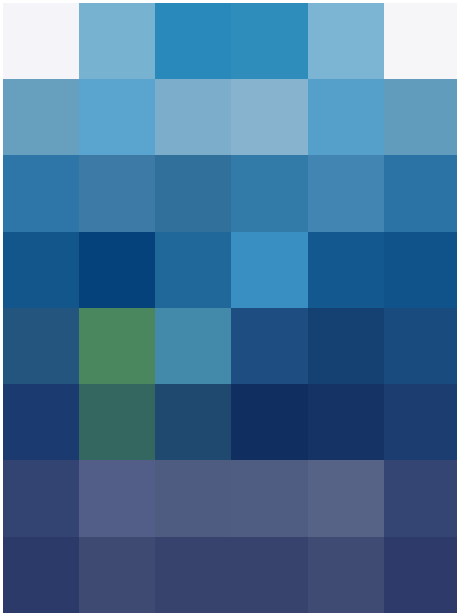

[\(/media/zn2dbklo/cyber-essentials-certified-plus.png\)](#)



[\(/media/dyelbliq/cyber-essentials-certified.png\)](#)