

AMS 5629 - PH 13/8MO STAINLESS STEEL

PH 13/8MO STAINLESS STEEL

PH 13/8 MO is a precipitation hardening stainless steel alloy that conforms to the AMS 5629, AMS 5864, AMS 5862 specifications.

This material is characterised by excellent strength, corrosion resistance, and toughness at both room and elevated temperatures.

PH 13/8 MO (uns s13800) is often used in aerospace, chemical processing, and power generation applications where high strength and corrosion resistance are essential. The material is not particularly easy to work with due to its high strength and toughness, which can make cutting and machining difficult. However, with the proper equipment and techniques, it is possible to fabricate and form PH 13/8 MO into complex shapes and components.

It is a medium to high strength material achieved through appropriate ageing treatments (see table below) and contains very good resistance to stress corrosion. PH 13/8MO stainless steel is produced by Vacuum Induction Melting (VIM) followed by Vacuum Arc Remelting (VAR).

Specific Gravity											
7.76 g/cm ³											
Typical Applications						Related Specifications					
Fasteners						AMS 5629					
Valves						AMS 5862					
Fittings						UNS S13800					
Petrochemical Components						W.Nr 1.4534					
Aircraft Structural parts											
Chemical Composition (Wt %)											
	C	Si	Mn	P	S	Cr	Mo	Ni	Al	N	Fe
Min	–	–	–	–	–	12.24	2.00	7.50	0.90	–	Bal
Max	0.05	0.10	0.10	0.01	0.008	13.25	2.50	8.50	1.35	0.010	–
Typical Mechanical Properties											
				0.2% Proof	Tensile Strength	Elongation	Reduction of area	Hardness			

	Stress					
	MPA	MPA	%	%		HRC
	Min	Min	Min	Min		Min
H950	1413	1517	10	45	35	45
H1000	1310	1413	10	60	40	43
H1025	1207	1276	11	50	45	41
H1050	1138	1207	12	50	45	40
H1100	931	1034	14	50	50	34
H1150	621	931	14	50	50	30

* This data has been supplied in good faith and is indicative only. It has been provided for general information purposes only and is not to be relied upon in place of the full specification. Mechanical properties can vary considerably with different supply conditions such as heat treatment or temper and product dimensions.

No liability will be accepted by Dynamic Metals Ltd in respect of any action taken by any third party in reliance of any of the data provided.

The information provided in this datasheet has been taken from multiple recognised sources. No guarantee is given that the information is from the latest issue of these sources and no guarantee is given that the information in the datasheet is accurate or up to date.

Material supplied by Dynamic Metals Ltd may vary significantly from this data but will conform to the relevant and applicable standards. All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale.

As the products detailed may be used for a wide variety of purposes and as Dynamic Metals Ltd has no control over their use, Dynamic Metals Ltd specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied.

Advice given by Dynamic Metals Ltd to any third party is given for that party's assistance only and without liability on the part of Dynamic Metals Ltd.

All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale. The extent of the Company's liabilities to any customer is clearly set out in those Conditions, a copy of which is available by request or by downloading from our website.

General Enquiries

T: +44 (0) 1525 217 556 [\(tel:+4401525217556\)](tel:+4401525217556)

E: sales@dynamicmetalsltd.com [\(mailto:sales@dynamicmetalsltd.com\)](mailto:sales@dynamicmetalsltd.com)



UK Address:

Head Office

40 Eden Way
 Chartwell Business Park
 Leighton Buzzard
 Bedfordshire
 LU7 4FY

T: +44 (0)1525 217 556 [\(tel:+441525217556\)](tel:+441525217556)

Conversion Centre


Suite 2 Meadowhall Riverside
Meadowhall Road
Sheffield
South Yorkshire
S9 1BW

T: +44 (0)1143 030 320 [_\(tel:+4401143030320\)](tel:+4401143030320)

Registered Office (only)

The Granary
Crowhill Farm Ravensden Road
Wilden
Bedfordshire
MK44 2QS

T: +44 (0)1525 217 556 [_\(tel:+441525217556\)](tel:+441525217556)

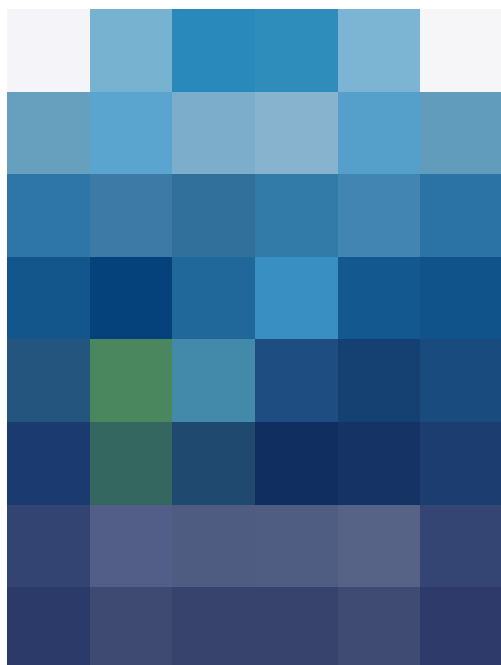

[\(/media/zn2dbklo/cyber-essentials-certified-plus.png\)](/media/zn2dbklo/cyber-essentials-certified-plus.png)



[\(/media/dyelbliq/cyber-essentials-certified.png\)](#)