AMS 5667, AMS 5542, AMS 5598 - X750 Nickel Alloy

Typical Applications

Gas Turbines

Rocket Engines

Springs

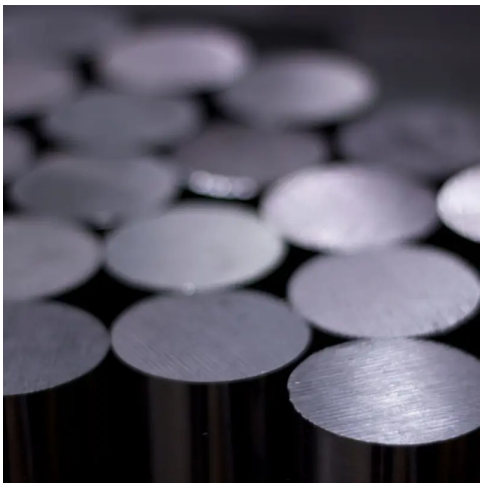

Alloy X750 (AMS 5542, AMS 5598, AMS 5667) is a precipitation-hardenable nickel chromium alloy, offering good strength and corrosion resistance at elevated temperatures.

Nickel Alloy X750 can be used in applications that range from gas turbines and rocket engines, to springs and fasteners used at cryogenic temperatures.

Related Products

Alloy 200 201

Alloy 625 Bar

Alloy 625 Sheet And Plate

Alloy 718 Bar

Alloy 718 Sheet Plate

Alloy 75

Alloy 80A

Alloy X750

Alloy X Bar

Alloy X Sheet Plate

C263

Mp159 R Bar

Mp35N R

Rene 41

Waspaloy

Alloy 90

Alloy 901

Technical specification

Related Specifications

AMS 5542

AMS 5598

AMS 5667

ASTM B637

Need more information? ***Get in touch***

General Enquiries

+44(0) 1525 217 556

Email us here

Head Office

40 Eden Way
Chartwell Business Park
Leighton Buzzard
Bedfordshire
LU7 4FY

T: +44 (0)1525 217 556

Conversion Centre

Suite 2 Meadowhall Riverside
Meadowhall Road
Sheffield
South Yorkshire
S9 1BW

T: +44 (0)1143 030 320

Useful Links

Privacy Policy

Sitemap