

AERMET 100 STAINLESS STEEL - AMS 6532

Aermet 100 steel has a high hardness and strength combined with very good toughness and ductility. Aermet 100 is generally used for applications that require high strength, high fracture toughness and good resistance to stress corrosion cracking and fatigue.

Specific Gravity															
7.9 g/cm ³															
Typical Applications								Related Specifications							
Landing Gear Drive Shafts Fasteners Actuators Jet Engine Shafts								AMS 6532 UNS K92580							
Chemical Composition															
	C	Al	Co	Cr	Mn	Mo	N	Ni	O	P	S	S+P	Si	Ti	Fe
Min	0.21	–	13	2.9	–	1.1	–	11	–	–	–	–	–	–	Bal
Max	0.25	0.015	14	3.3	0.1	1.3	0.0015	12	0.002	0.008	0.005	0.01	0.1	0.015	–
Typical Mechanical Properties after heat treatment															
									0.2% Proof Stress	Tensile Strength	Elongation	Reduction of area			
									MPA	MPA	%	%			
									Min	Min	Min	Min			
Longitudinal									1620	1931	10	55			
Transverse									1620	1931	8	45			

* This data has been supplied in good faith and is indicative only. It has been provided for general information purposes only and is not to be relied upon in place of the full specification. Mechanical properties can vary considerably with different supply conditions such as heat treatment or temper and product dimensions.

No liability will be accepted by Dynamic Metals Ltd in respect of any action taken by any third party in reliance of any of the data provided.

The information provided in this datasheet has been taken from multiple recognised sources. No guarantee is given that the information is from the latest issue of these sources and no guarantee is given that the information in the datasheet is accurate or up to date.

Material supplied by Dynamic Metals Ltd may vary significantly from this data but will conform to the relevant and applicable standards. All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale.

As the products detailed may be used for a wide variety of purposes and as Dynamic Metals Ltd has no control over their use, Dynamic Metals Ltd specifically excludes all conditions or warranties expressed or implied by statute or otherwise as to dimensions, properties and/or fitness for any particular purpose, whether expressed or implied.

Advice given by Dynamic Metals Ltd to any third party is given for that party's assistance only and without liability on the part of Dynamic Metals Ltd.

All transactions are subject to Dynamic Metals Ltd latest Terms and Conditions of Sale. The extent of the Company's liabilities to any customer is clearly set out in those Conditions; a copy of which is available by request or by downloading from our website.

General Enquiries

T: +44 (0) 1525 217 556 [_\(tel:+4401525217556\)](tel:+4401525217556)

E: sales@dynamicmetalsltd.com [_\(mailto:sales@dynamicmetalsltd.com\)](mailto:sales@dynamicmetalsltd.com)



UK Address:

Head Office

40 Eden Way
Chartwell Business Park
Leighton Buzzard
Bedfordshire
LU7 4FY

T: +44 (0)1525 217 556 [_\(tel:+441525217556\)](tel:+441525217556)

Conversion Centre


Suite 2 Meadowhall Riverside
Meadowhall Road
Sheffield
South Yorkshire
S9 1BW

T: +44 (0)1143 030 320 [_\(tel:+4401143030320\)](tel:+4401143030320)


Registered Office (only)

The Granary
Crowhill Farm Ravensden Road
Wilden
Bedfordshire
MK44 2QS

T: +44 (0)1525 217 556 [_\(tel:+441525217556\)](tel:+441525217556)

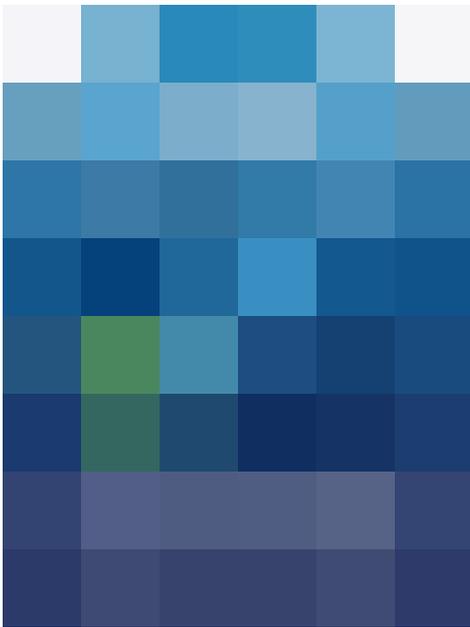

[\(/media/zn2dbklo/cyber-essentials-certified-plus.png\)](/media/zn2dbklo/cyber-essentials-certified-plus.png)

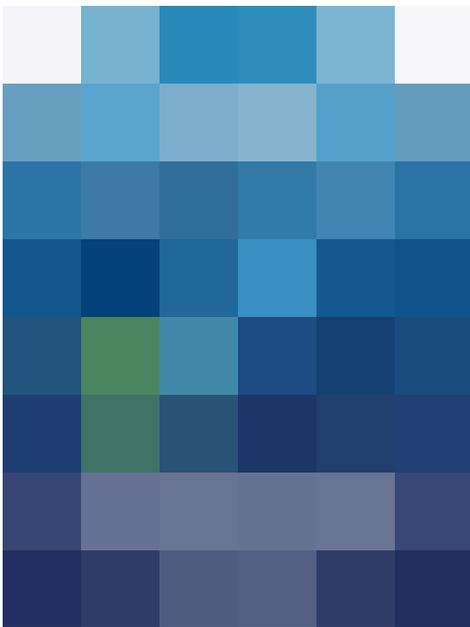

[\(/media/dyelbliq/cyber-essentials-certified.png\)](/media/dyelbliq/cyber-essentials-certified.png)